

KEL-JUMBO flex pyramid cable entry grommets

for single cables with diameters up to 68 mm / IP54 / UL Type 12



The KEL-JUMBO flex is a flexible cable entry grommet for cables without connectors with a diameter range from 27 - 68 mm. They are ideal for the routing supply cables into the switch cabinets.

Cutting of KEL-JUMBO flex grommets: Cable diameter less 25%. The corresponding diameters are marked on the grommet.

It is recommended that additional strain relief be provided for cables using cable ties.



Specifications


IP rating (EN 60529)	IP54
UL Type (UL 50E)	UL Type 12
Material	Elastomer Base frame: Polyamide
Flame class	UL94-V0, self-extinguishing
Operating temperature	-40 C° to 100 C°
Properties	halogen free, silicone free
Mounting options	Screw type mounting

Advantages & Benefits


- It is possible to install rigid cables at angles
- Compact installation area (88 × 88 mm)

Product types & Sizes

KEL-JUMBO flex 27-48 gy

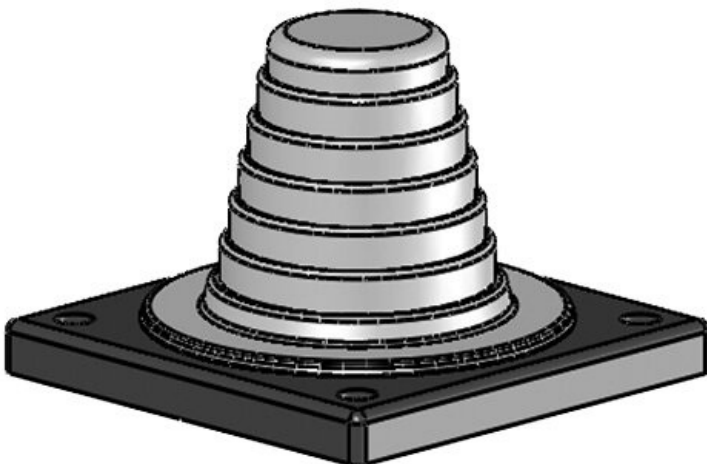

Part No.	42614	Width	88 mm
EAN	4251269309	Height	62 mm
	021	Mounting height	62 mm
Package quantity	1	Cut-out size, round	57,6 mm
For max. no. of cables	1	No. of screw holes	4
Max. cable diameter	48 mm	Diam. of screw holes	6,9 mm
Color	gray (similar RAL 7035)	Clamping range	1 x 27 - 48 mm
Length	88 mm		

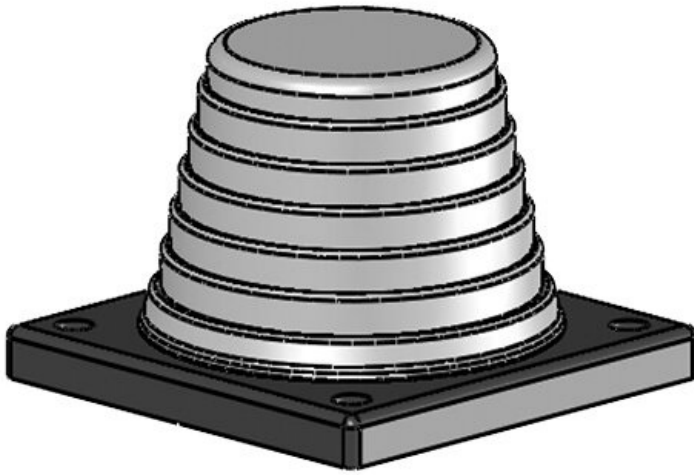

Part No.	42616	Width	88 mm
EAN	4251269309038	Height	62 mm
		Mounting height	62 mm
Package quantity	1	Cut-out size, round	75,5 mm
For max. no. of cables	1	No. of screw holes	4
Max. cable diameter	68 mm	Diam. of screw holes	6,9 mm
Color	gray (similar RAL 7035)	Clamping range	1 x 47 - 68 mm
Length	88 mm		